

Fire Department Rated

### Duo Safety Solid Beam Aluminum Ladders

These ladders incorporate Duo-Safety's exclusive tongue and groove arrangement. This outstanding construction design holds the sections firmly and rigidly, without brackets, hooks, or obstructions of any kind. These compact ladders require a minimum of banking space - and have the extra advantage of being especially stable and rigid.

#### Series 900-A - Series 925-A

3-1/4" Channel Rail - 750lb Duty Rated



SPECIFICATIONS				
SERIES 900-A 2-SECTION				
Size	Closed Length	Width	Banking Thickness	Weight
20'	12' 2.75"	21.75"	5.375"	60#
24'	14' 2.75"	21.75"	5.375"	72#
SERIES 925-A 3-SECTION				
Size	Closed Length	Width	Banking Thickness	Weight
22'	10' 8.75"	24"	7.625"	82#
26'	11' 8.75"	24"	7.625"	92#

All dimensions listed are N.F.P.A. Design Verification Standards. Variations occur in each product of approximately +/- .125" due to the type of rivets, nuts, bolts etc. used. If you require precise dimensions, please call our office and request a copy of our current field dimension sheets.

Two Section - Series 900-A

Prong feet as Standard - Rubber safety shoes optional for hard surface use.



#### Series 1200-A - Series 1225-A

3-3/4" Channel Rail - 750lb Duty Rated

SPECIFICATIONS				
SERIES 1200-A 2-SECTION				
Size	Closed Length	Width	Banking Thickness	Weight
28'	16' 3.25"	24"	6.5"	87#
30'	18' 3.25"	24"	6.5"	107#
35'	20' 3.25"	24"	6.5"	122#
SERIES 1225-A 3-SECTION				
Size	Closed Length	Width	Banking Thickness	Weight
28'	12' 11"	24"	9.125"	107#
30'	13' 3"	24"	9.125"	108#
35'	15' 3"	24"	9.125"	129#

All dimensions listed are N.F.P.A. Design Verification Standards. Variations occur in each product of approximately +/- .125" due to the type of rivets, nuts, bolts etc. used. If you require precise dimensions, please call our office and request a copy of our current field dimension sheets.

Three Section - Series 1225-A

Prong feet as Standard - Rubber safety shoes optional for hard surface use.



Maritime Provinces  
 Phone: (902) 468-6060  
 Fax: (902) 468-9090  
 Toll Free (800) 667-3030

Newfoundland  
 Phone: (709) 747-3099  
 Fax: (709) 747-3098  
 Toll Free (888) 941-6224

Fire Department Rated

## Duo Safety Aluminum Roof Ladders

Famous Duo-Safety Rail Construction provides the advantage of extra strength without cumbersome weight. Ideal for pumper use - these outstanding ladders have been proven and approved for many years by fire companies everywhere.

### Series 775-A - Series 875-A - Series 1275-A

Channel Rail Construction - 750lb Duty Rated



SPECIFICATIONS				
SERIES 775-A ROOF				
Size	Closed Length	Width	Rail Size	Weight
10'	10' 2.25"	19"	2.75"	22#
12'	12' 2.25"	19"	2.75"	24#
14'	14' 2.25"	19"	2.75"	28#
SERIES 875-A ROOF				
Size	Closed Length	Width	Rail Size	Weight
16'	16' 2.5"	19"	3.25"	39#
18'	18' 2.5"	19"	3.25"	44#
20'	20' 2.5"	19"	3.25"	48#
SERIES 1275-A ROOF				
Size	Closed Length	Width	Rail Size	Weight
25'	25' 3"	19"	3.75"	64#
30'	30' 3"	19"	3.75"	72#

All dimensions listed are N.F.P.A. Design Verification Standards. Variations occur in each product of approximately +/- .125" due to the type of rivets, nuts, bolts etc. used. If you require precise dimensions, please call our office and request a copy of our current field dimension sheets.

Prong feet as Standard - Rubber safety shoes optional for hard surface use.

## Duo-Safety Folding Ladders

The ultimate in handy, convenient ladders - Light weight, these ladders fold into a compact bundle for storing or carrying. In the open position, special locking devices keep the ladders absolutely rigid. Equipped with Duo-Safety Ladder shoes as an extra precaution. See our Aluminum Price List for current pricing.

### Series 585-A Aluminum

300lb Duty Rated



Series 585-A

SPECIFICATIONS					
SERIES 585-A Aluminum					
Size	Open Length	Closed Length	Open Width	Banking Dimensions	Weight
8'	8' .375"	8' 9.75"	12.12"	*1.75"x4.25"	13#
9'	9' 1.87"	10' .25"	12.12"	*1.75"x4.25"	15#
10'	10' 1.87"	11' .25"	12.12"	*1.75"x4.25"	16#
12'	12' .375"	12' 10.75"	12.12"	*1.75"x4.25"	20#
14'	14' .375"	14' 10.75"	12.12"	*1.75"x4.25"	22#

\*Overall width includes shoes


All dimensions listed are N.F.P.A. Design Verification Standards. Variations occur in each product of approximately +/- .125" due to the type of rivets, nuts, bolts etc. used. If you require precise dimensions, please call our office and request a copy of our current field dimension sheets.



Maritime Provinces  
 Phone: (902) 468-6060  
 Fax: (902) 468-9090  
 Toll Free (800) 667-3030

Newfoundland  
 Phone: (709) 747-3099  
 Fax: (709) 747-3098  
 Toll Free (888) 941-6224

### Industrial Rated

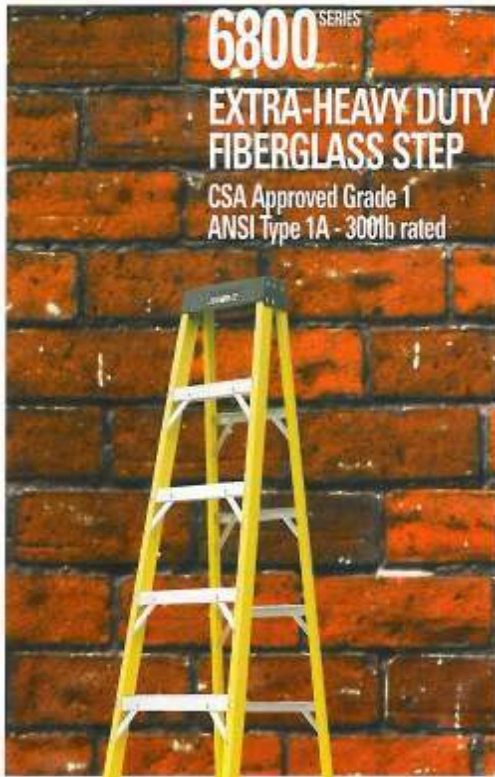

**6800** SERIES  
**EXTRA-HEAVY DUTY FIBERGLASS STEP**  
 CSA Approved Grade 1  
 ANSI Type 1A - 300lb rated

OUR TOP OF THE LINE LADDER FOR DEMANDING INDUSTRIAL USE

- Durable non-conductive "C" channel side rails in high visibility safety yellow
- New widened flare for greater stability
- Slip-resistant serrated aluminum steps
- Super-tough moulded copolymer top
- Inside spreader arms complete with new "wrap-around" brackets to strengthen spreader-to-rail connection
- New double bracing on bottom step for extra rigidity
- New bottom rail aluminum supports provide unequalled support
- Full rear horizontal braces every 12"
- "K" braces on every step and rear horizontal brace



PART NO.	SIZE	OPEN HEIGHT	HIGHEST STANDING HEIGHT	BASE WIDTH	BASE DEPTH	APPROX WEIGHT
						lbs kgs
6804	4'	46"	23"	20"	28"	15 6.8
6806	6'	88"	45"	23"	38"	26 11.8
6807	7'	79"	56"	24"	44"	30 13.6
6808	8'	90"	67"	25"	50"	34 15.5
6810	10'	113"	90"	28"	61"	43 19.5
6812	12'	133"	114"	31"	74"	57 25.9



**6100, 6200, 6200D** SERIES  
**EXTRA-HEAVY DUTY FIBERGLASS STRAIGHT & EXTENSION**  
 CSA Approved Grade 1  
 ANSI Type 1A - 300lb rated

CANADA'S #1 FIBERGLASS EXTENSION LADDER

- Durable non-conductive "C" channel side rails in high visibility safety yellow
- Riveted rung to rail design maintains continuous strength of fibers and allows for easy repair
- Slip-resistant serrated aluminum rungs
- Exclusive "1-Piece" foot assembly with spur wheel provides unequalled strength and durability
- Heavy duty spring loaded rung locks

AVAILABLE OPTIONS PART NO.

- Pair of swivel cable hooks c/w rubber sleeve 93063
- Pole strap 93061
- Swivel "V" rung 99125
- Yellow rubber end caps 99129
- "Duo feet" in place of 1-Piece design 99127
- Non-slip rubber strips on the rear of the fly for superior grip on strand (For round rung ladders only) 96322



#### STRAIGHT - ROUND RUNG

PART NO.	SIZE	OUTSIDE WIDTH	INSIDE WIDTH	APPROX WEIGHT
				lbs kgs
6108	8'	17 3/8"	15"	18 8.2
6110	10'	17 3/8"	15"	21 9.5
6112	12'	17 3/8"	15"	24 10.9
6114	14'	17 3/8"	15"	28 12.7
6116	16'	17 3/8"	15"	32 14.5

#### TWO SECTION EXTENSION - ROUND RUNG

PART NO.	SIZE	MAXIMUM OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX WEIGHT
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH	
							lbs kgs
6216	16'	13'	17 3/8"	15"	16 5/8"	14 1/4"	38 17.2
6220	20'	17'	17 3/8"	15"	16 5/8"	14 1/4"	44 19.9
6222	22'	19'	17 3/8"	15"	16 5/8"	14 1/4"	48 21.8
6224	24'	21'	17 3/8"	15"	16 5/8"	14 1/4"	52 23.6
6228	28'	25'	17 3/8"	15"	16 5/8"	14 1/4"	59 26.8
6232	32'	29'	17 3/8"	15"	16 5/8"	14 1/4"	66 29.9

#### THREE SECTION EXTENSION - D RUNG


PART NO.	SIZE	MAXIMUM OPEN LENGTH	BASE SECTION		FLY SECTION		APPROX WEIGHT
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH	
							lbs kgs
6216D	16'	13'	17 3/8"	15"	16 5/8"	14 1/4"	39 17.6
6220D	20'	17'	17 3/8"	15"	16 5/8"	14 1/4"	46 20.8
6222D	22'	19'	17 3/8"	15"	16 5/8"	14 1/4"	50 22.7
6224D	24'	21'	17 3/8"	15"	16 5/8"	14 1/4"	55 24.9
6228D	28'	25'	17 3/8"	15"	16 5/8"	14 1/4"	63 28.6
6232D	32'	29'	17 3/8"	15"	16 5/8"	14 1/4"	70 31.7
6236D	36'	32'	19"	15 1/2"	17 3/4"	14 1/4"	96 43.5
6240D	40'	35'	19"	15 1/2"	17 3/4"	14 1/4"	106 48.1



Maritime Provinces  
 Phone: (902) 468-6060  
 Fax: (902) 468-9090  
 Toll Free (800) 667-3030

Newfoundland  
 Phone: (709) 747-3099  
 Fax: (709) 747-3098  
 Toll Free (888) 941-6224

Industrial Rated

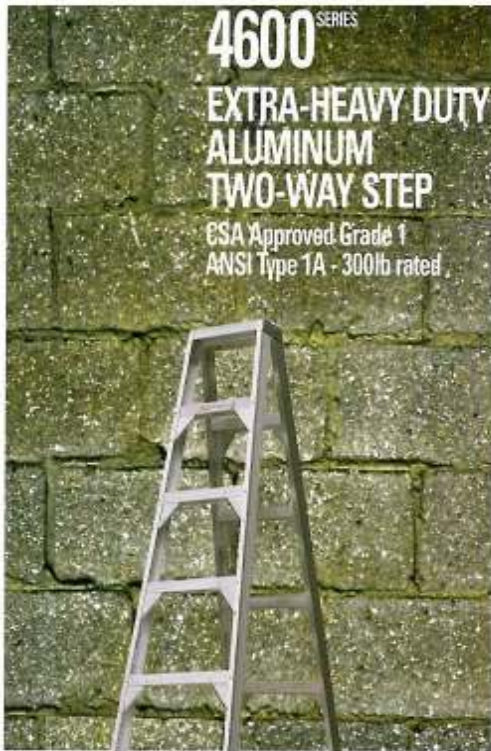


**4600** SERIES  
**EXTRA-HEAVY DUTY ALUMINUM TWO-WAY STEP**  
 CSA Approved Grade 1  
 ANSI Type 1A - 300lb rated

**DOUBLE FRONT CONSTRUCTION ALLOWS ACCESS FROM EITHER SIDE**

- Extra-wide 3 1/2" slip-resistant serrated steps and side rails
- Exclusive solid triangular step braces provide unequalled rigidity
- Extra-thick top brackets for greater stability
- "J" shaped spreader arms
- Heavy duty rubber safety shoes

PART NO.	SIZE	OPEN HEIGHT	HIGHEST STANDING HEIGHT	BASE WIDTH	BASE DEPTH	APPROX. WEIGHT lbs	kg
4606	6'	67"	46"	23"	56"	25	11.4
4608	8'	90"	68"	26"	73"	32	14.5
4610	10'	112"	90"	28"	88"	41	18.6

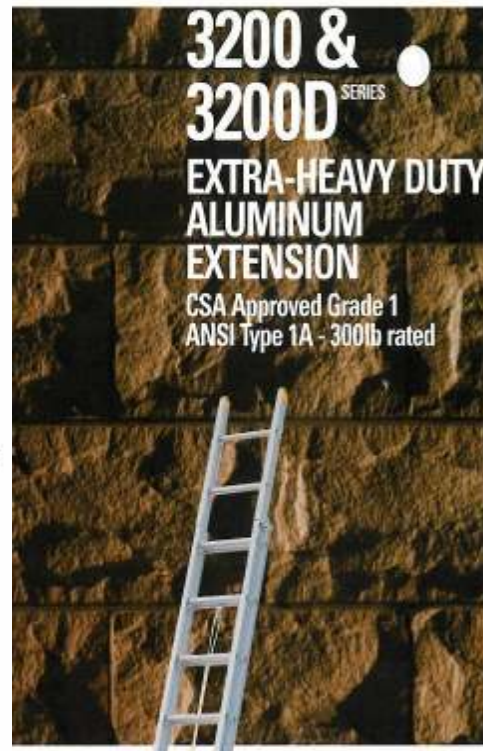

**3200 & 3200D** SERIES  
**EXTRA-HEAVY DUTY ALUMINUM EXTENSION**  
 CSA Approved Grade 1  
 ANSI Type 1A - 300lb rated

**A RUGGED "I" BEAM EXTENSION SUITABLE FOR DEMANDING INDUSTRIAL APPLICATIONS**

- Heavy duty "I" Beam construction, 3 1/16" x 1 1/4" rails provide stability, torque resistance and high strength to weight ratio
- Heavy duty serrated rungs prevent slipping for safe and sure climbing
- Yellow ABS, high impact, non-marring end caps
- Heavy duty spring loaded rung locks
- Heavy duty swivel feet c/w cog wheel

**TWO SECTION EXTENSION - ROUND RAILS**

PART NO.	SIZE	MAXIMUM OPEN LENGTH	BASE SECTION		TOP SECTION		APPROX. WEIGHT lbs	kg
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH		
3216	16'	13'	17 5/8"	15 1/8"	16"	13 1/2"	29	13.2
3220	20'	17'	17 5/8"	15 1/8"	16"	13 1/2"	34	15.4
3224	24'	21'	17 5/8"	15 1/8"	16"	13 1/2"	41	18.6
3228	28'	25'	17 5/8"	15 1/8"	16"	13 1/2"	50	22.7
3232	32'	29'	17 5/8"	15 1/8"	16"	13 1/2"	57	25.9
3236	36'	32'	17 5/8"	15 1/8"	16"	13 1/2"	66	29.9
3240	40'	35'	17 5/8"	15 1/8"	16"	13 1/2"	73	33.1

**TWO SECTION EXTENSION - D RAILS**

PART NO.	SIZE	MAXIMUM OPEN LENGTH	BASE SECTION		TOP SECTION		APPROX. WEIGHT lbs	kg
			OUTSIDE WIDTH	INSIDE WIDTH	OUTSIDE WIDTH	INSIDE WIDTH		
3216D	16'	13'	17 3/4"	15 1/4"	16 1/8"	13 5/8"	31	14.1
3220D	20'	17'	17 3/4"	15 1/4"	16 1/8"	13 5/8"	36	16.3
3224D	24'	21'	17 3/4"	15 1/4"	16 1/8"	13 5/8"	43	19.5
3228D	28'	25'	17 3/4"	15 1/4"	16 1/8"	13 5/8"	53	24.0
3232D	32'	29'	17 3/4"	15 1/4"	16 1/8"	13 5/8"	60	27.2
3236D	36'	32'	17 3/4"	15 1/4"	16 1/8"	13 5/8"	69	31.3
3240D	40'	35'	17 3/4"	15 1/4"	16 1/8"	13 5/8"	77	34.9



**Maritime Provinces**  
 Phone: (902) 468-6060  
 Fax: (902) 468-9090  
 Toll Free (800) 667-3030

**Newfoundland**  
 Phone: (709) 747-3099  
 Fax: (709) 747-3098  
 Toll Free (888) 941-6224